ML350

Monitored Electric Lock

- Operating voltage 12Vdc
  (24Vdc available to order)
- Stainless Steel
- Fail-safe
- Fire resistant
- 1500lbs holding force
- 500lbs side-load
- Monitored

FIRE RESISTANT

STAINLESS STEEL

500 LBS SIDELOAD

UK FIRE TESTED

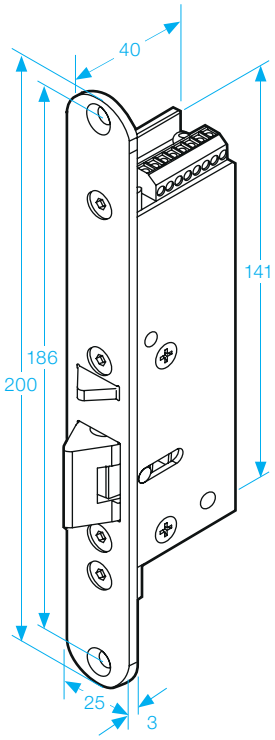

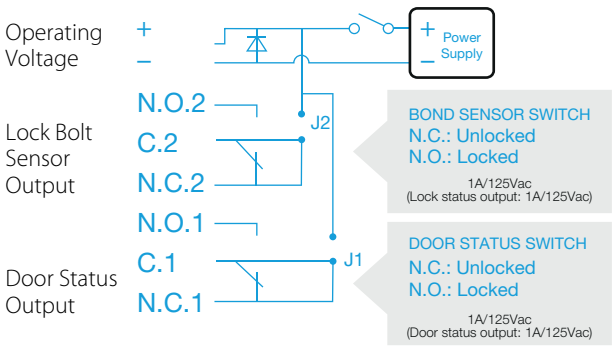

SPECIFICATION

- Voltage tolerance: ±10%.
- Current draw: 280mA at 12Vdc, 140mA at 24Vdc *(at temperature 20°C).*
- Operating temperature: -10~45°C *(14 to 131°F).*
- Lock's surface temperature: Current temperature ±20% *(when power is on).*
- Humidity: 0~95% non-condensing.
- Solenoids tested to 250,000 cycles.
- Weight: 673g *(approx).*