PH900

Unmonitored Door Handle Magnet

- Operating voltage 12~24Vdc
- Aluminium
- Unmonitored
- Fail-Safe *(Power to Lock)*
- Holding force 2 x 600lbs *(545Kg)*

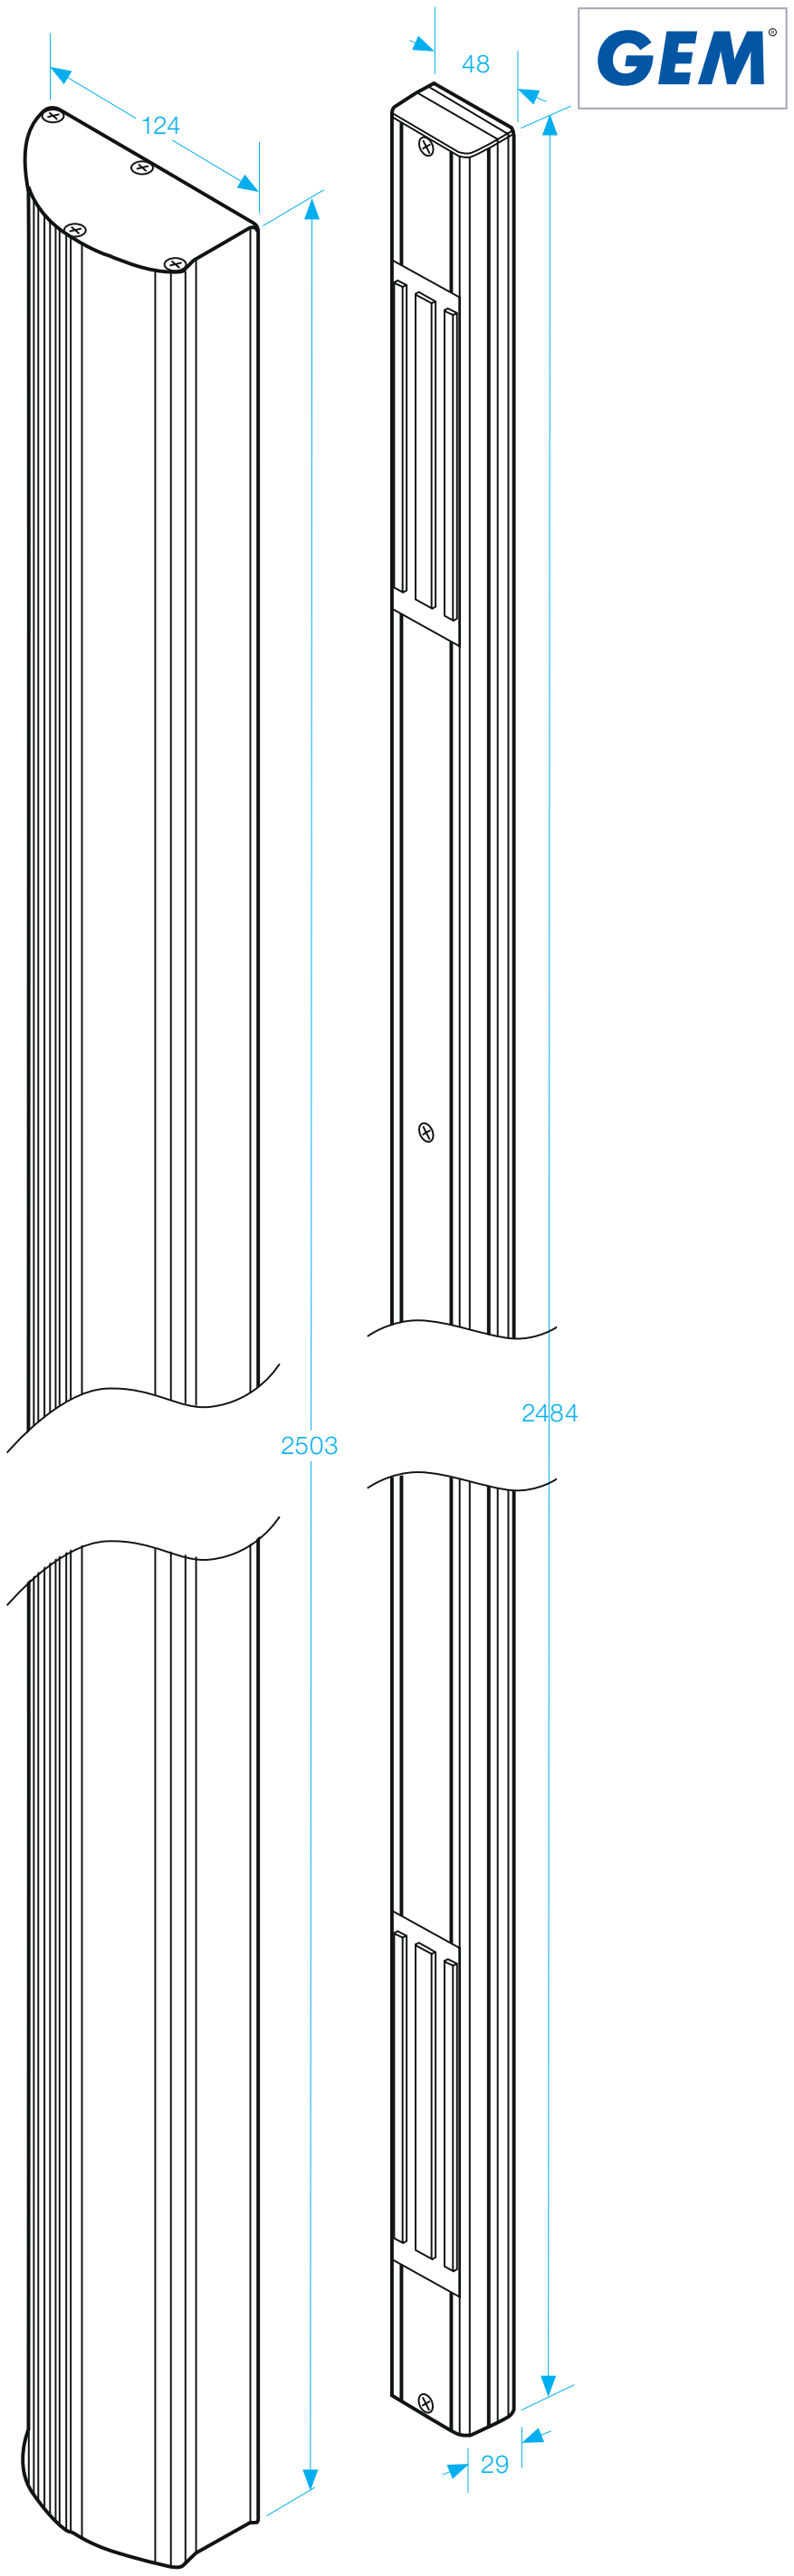

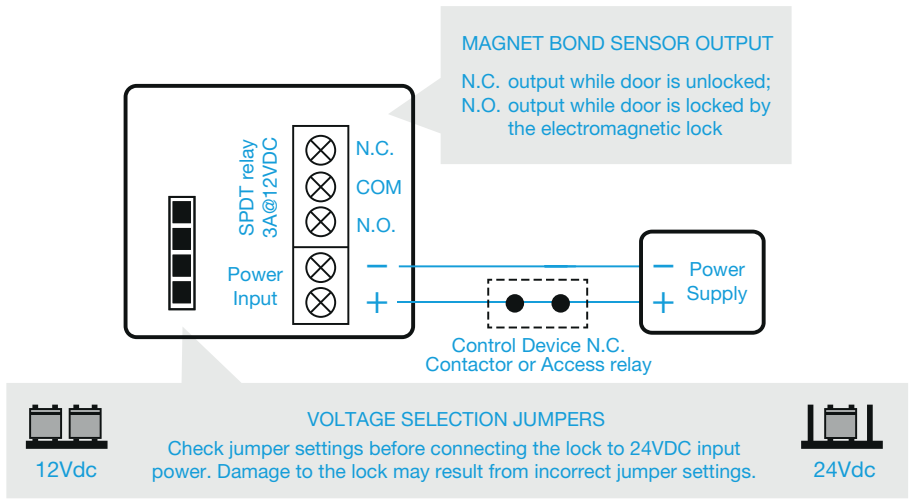

SPECIFICATION

- Voltage tolerance: ±15%.
- Current draw: 2 x 500mA at 12Vdc *(at temperature 20°C)*.
- Operating temperature: -10~55°C *(14 to 131°F)*.
- Lock's surface temperature: Current temperature ±20% *(when power is on)*.
- Magnetic bond sensor monitor output remotely monitors the door lock or unlock status. *(N.C. Output-Door opened; N.O. Output-door closed) (SPDT rated 3A at 12Vdc)*.
- Humidity: 0~95% non-condensing.
- Special Zinc finish for magnet and armature plate.
- Weight: 8.0kg *(approx)*.

All dimensions in mm