IPGUARD TOUCH 4G/IP/GSM
FOR SMALLER SITES

COMMERCIAL & RESIDENTIAL

FROM 1 TO 4 CALL BUTTONS WITH DIGITAL LABELS

Program up to 4 displays accessible in 1 click via direct call buttons.

The names are displayed directly on the 4G Mini Touch screen just above the corresponding call button.

DISPLAY UP TO 4 LOGOS ON YOUR 4G MINI TOUCH

Display your logos at the entrance to the building.

DYNAMIC SCREEN

The display area auto-adapts to the length of and number of names to be displayed.

If there is only one name the entire screen is used.

Dynamic name scrolling and two line display features for long names.





TECHNICAL SPECIFICATIONS

	IPGUARD® PRO	IPGUARD® MINI	IPGUARD® MINI PLUS	IPGUARD® MINI TOUCH
REFERENCES	**TP4G-11X**	**TP4G-AX**	**TP4G-IX**	**TP4G-XNA**
MECHANICAL CHARACTERISTICS				
Facia dim. (HxWxD)	350 x 160 x 3 mm	270 x 120 x 14 mm	280 x 120 x 3 mm	280 x 120 x 3 mm
Backbox dim. (HxWxD)	335 x 142 x 60 mm	245 x 95 x 45 mm	254 x 95 x 60 mm	254 x 95 x 60 mm
Flush flange (HxW)	380 x 200 mm	–	–	–
Material	Stainless Steel 316	Aluminium in Silver / Champagne / Matt Black	Stainless Steel 316 / Brass	Aluminium / S. Steel 316 / Brass
Finish	Brushed	Brushed	Brushed	Brushed
Protection rating	IK09 / IP54	IK09 / IP54	IK09 / IP54	IK09 / IP54
ELECTRICAL CHARACTERISTICS				
Power	12 V DC			
Consumption	2A max (whilst communicating via 4G)			
Relay	2 relays 5 A rated NO/NC programmable	1 relay 5 A rated NO/NC programmable		
Temperature	Operating -20°C to 60°C / Storage -40°C to 85°C	Operating -25°C to 70°C / Storage -40°C to 85°C		
FEATURES				
Colour camera	1. Pinhole hidden, angle of view H 60°, V 45° 2. Wide, angle of view H 90°, V 75°	Pinhole hidden, angle of view H 60°, V 45°		
Screen	TFT colour 3.5“	Customisable TFT colour 2.9“		
Proximity reader	Anti-vandal lexan, illuminated	Anti-vandal lexan, illuminated		
Coded keypad	2000 codes, large 15.6mm dia raised illuminated buttons, braille embossed			
Capacity	3000 flats	3000 flats		1 to 4 flats
Inputs	2 no			
Smartphone App	IPGUARD APP on Google Play (Android), App Store (APPLE)			
Programming	WWW.BATICONNECT.COM available 24/7/365 real time			
Standard features	Customisable welcome screen – Backlight compensation – Proximity key and radio transmitter ANTI-CLONE guarantee – Smartphone access			
Mobile access	Open door via App on smart devices from anywhere, at any time			
Advanced features	Hearing aid loop	No	Hearing aid loop	With/without hearing aid loop

IPGUARD APP
THE BEST VIDEO RECEIVER IS ALWAYS WITH YOU

HOW DOES IT WORK?

THE VISITOR CALLS THE FLAT

I ANSWER AND SEE THE VISITOR*

I OPEN THE DOOR FROM MY DEVICE

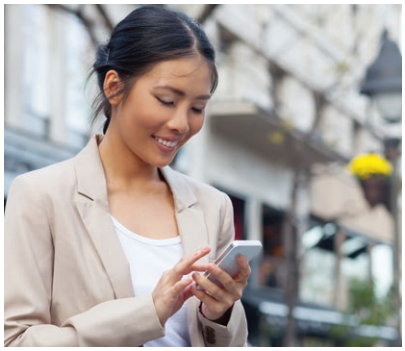

*** Smartphone, iPad, tablet etc.**

LIVE HD VIDEO OF VISITORS

See your visitors and open the door via the APP.

All openings are logged for security.

PICTURE LOG OF ALL VISITORS

View a log of all visitor calls – received, missed, door opened, access denied – all with time and date.

HD QUALITY IMAGES

MULTI RELAYS CONTROLS

Open the door or vehicle gate.

Speak handsfree or privately.

PREVIEWING

Discrete preview before answering.

Shows visitor calling location.

Press REFUSE to cancel the call if you do not want to answer.

ZOOM IN & FULL SCREEN